ICEU070 - Self Contained Cube Ice Maker

ICEU070

Features

- Space saving 15.2" (386 mm) wide undercounter design.
- Produces up to 84 lbs (38.1 kg) of ice per day.
- Built in storage bin stores up to 24 lbs (10.9 kg).
- Produces clear, long-lasting gourmet shaped ice.
- Energy Saving Systems that optimizes cycle efficiency and ice quality, while reducing energy consumption and cutting operating costs.
- Constructed from sturdy, corrosion-resistant stainless steel and fingerprint-proof plastic
- Ideal for any under counter or bar application.

Options & Accessories

Water Filters			
Ice Machine Model	Manifold		Inline
	System	Replacement	System
ICEU070	IFQ1	IOMQ (1)	IFI4C / IFI8C

Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.

- Three years **Parts** and **Labor**.
- Five years **Parts** coverage on the evaporator and compressor.

Ice Form

Shot-glass style	
W x D x H (in)	1 x 1 ⅛ x 1 ¼
W x D x H (mm)	25 x 29 x 32

Space-Saving Solutions

- Front air discharge design for compact spaces.
- Low profile top saves counter space.
- Stores up to 24 lbs (10.9 kg) of ice.
- Easy front access to ice.
- Power cord for quick installation
- Ideal for any under counter or bar application.
- Legs allow for cleaning below and aisle ventilation

ICEU070 Self Contained Cube Ice Maker

11100 E. 45th Avenue
Denver, CO 80239

Phone: 1. 866. PURE. ICE
Fax: 303. 371. 6296
www.iceomatic.com

Rev: A-07/08
Part: 1000

Enodis

Ice-O-Matic

ICEU070 Self Contained Cube Ice Maker

Air Cooled

Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.

A. ¾" outer diameter water outlet.
B. ¾" hose coupling threaded water inlet or ⅜" male flare (adapter included)
C. Exhaust air.
D. Intake air.

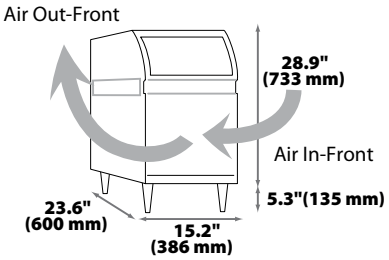

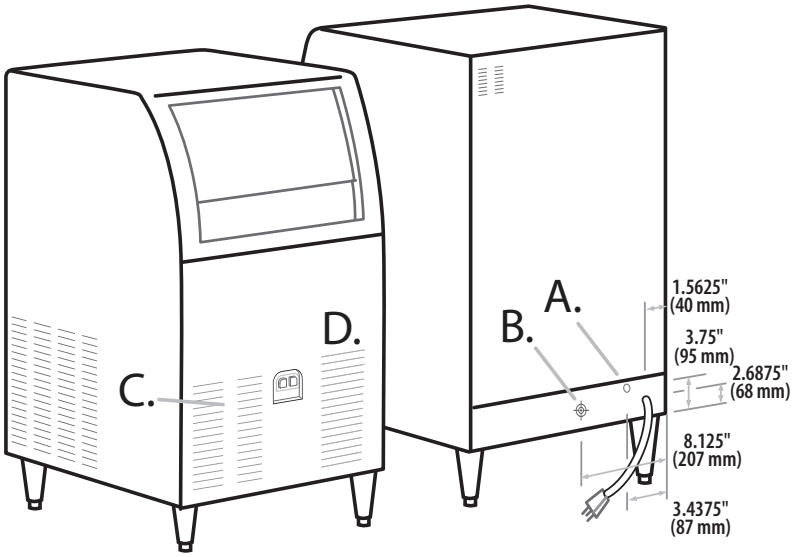

a

Operating Requirements

	Minimum	Maximum
Ambient Temp. Range Air	50˚F (10˚C)	100˚F (38˚C)
Water Temperature	40˚F (4.4˚C)	100˚F (38˚C)
Water Pressure	14 PSIG (1 bar)	70 PSIG (5 bar)

Dimensions

All Models	
W x D x H (inches)	15.2 x 23.6 x 34.2
W x D x H (mm)	381 x 584 x 870

Specifications

Model Number	Cond. Unit	Ice Production per 24hrs		Water Usage gallons per 100 lbs of Ice 90°F air/70°F water	kWH Used per 100 lbs of ice @ 90°F air/ 70°F water	Voltage Characteristics	TTL Load Amps	Fuse Size	Approx. BTUs per hour
		70°F air/ 50°F water lbs (kg)	90°F air/ 70°F water lbs (kg)	Potable					
ICEU070A	Air	84 (38.1)	66 (31)	37.0	13.5	115/60/1	6	15	2,700

NOTES:
Number of Wires: 3 (including ground)
Approx. Shipping Weight lbs (kg): 88 (39.9)
Refrigerant Type: R134A

11100 E. 45th Avenue
Denver, CO 80239

Phone: **1. 866. PURE. ICE**
Fax: **303. 371. 6296**
www.iceomatic.com

Rev: **A-07/08**
Part: **1000**

Enodis